

ARTESYN CSU2400AT SERIES

12V Distributed Power System



Advanced Energy's Artesyn CSU front end series is designed to provide a flexible power conversion solution for compute, storage, and networking equipment in the common redundant power supply (CRPS) form factor. This series of AC-DC products is housed in the industry standard 1U x 73.5 mm x 185 mm CRPS form factor. Featuring a power rating of 2400 W, the series can cover power hungry applications where there are space constraints.

AT A GLANCE

Front-end Bulk Power

Total Output Power

2400 W

Input Voltage

180 to 264 VAC

180 to 320 VDC

SPECIAL FEATURES

- Ultra-high density
- 1U power supply
- Active power factor correction
- EN61000-3-2 Harmonic compliance
- Inrush current control
- 80PLUS® Titanium efficiency
- N+N, N+1 redundant
- Hot-pluggable
- Active current sharing
- PMBus® compliant
- Closed loop throttle
- Cold redundancy
- Two-year warranty

COMPLIANCE

- Conducted/Radiated EMI Class A Limits
- RoHS
- IEC 60950/62368

SAFETY

- UL/cUL
- CB Test Certificate
- CE Mark
- KC
- EAC
- BIS
- CQC
- BSMI



TARGET APPLICATIONS


- Server and Storage
- Networking

ELECTRICAL SPECIFICATIONS

| Input | | | | | | |
|-------------------------------|---|--------|-----------|-------------------|--------|----------|
| Input Range and Output Power | 180-264 VAC | | 2400W | | | |
| Frequency | 47 Hz to 63 Hz | | | | | |
| Efficiency | 96.0% peak, titanium efficiency rating | | | | | |
| Max input current | 13.5A | | | | | |
| Inrush current | 35 Apk, cold start | | | | | |
| Conducted EMI | Class A | | | | | |
| Radiated EMI | Class A | | | | | |
| Power factor | >0.9 beginning at 10% load | | | | | |
| Hold-up time | 11 ms at full load | | | | | |
| Leakage current | <0.75 mA | | | | | |
| Output | | | | | | |
| | Main DC Output | | | Standby DC Output | | |
| | MIN | NOM | MAX | MIN | NOM | MAX |
| Nominal setting | -0.20% | 12.2 V | 0.20% | -3.5% | 12.0 V | +3.5% |
| Total output regulation range | -5% | | +5% | -5% | | +5% |
| Dynamic load regulation range | -5% | | +5% | -5% | | +5% |
| Output ripple | | | 1% | | | 1% |
| Output current | 1.0 A ¹ | | 196.7 A | 0.1 A | | 3.5 A |
| Current sharing | Within ±6% of full load rating, starting at 25% of PSU rated load | | | N/A | | |
| Capacitive loading | 2,000 µF | | 70,000 µF | 10 µF | | 3,100 µF |
| Output rise time | 10 ms | | 70 ms | 10 ms | | 70 ms |

¹ Minimum current for transient load response testing only. Unit is designed to operate and be within output regulation range at zero load

MECHANICAL OUTLINE

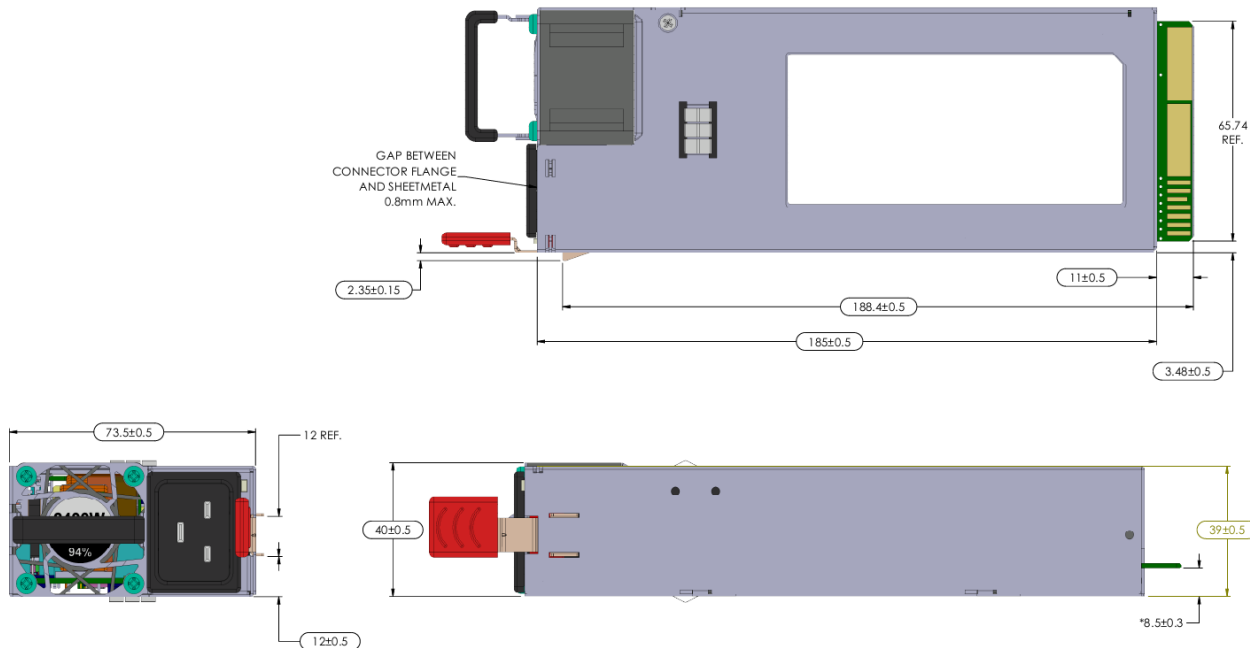

*DIMENSION SHALL BE MEASURED POINT-TO-POINT

ENVIRONMENTAL SPECIFICATIONS


| | | |
|--|-----------------|--|
| Operating temperature | Forward Airflow | -5 to 55°C full rated power. Allowable up to 65°C at 60% load for short term operation |
| | Reverse Airflow | TBD |
| Operating altitude | | Up to 10,000 feet ¹ |
| Operating relative humidity | | +5% to 95%, non-condensing |
| Non-operating temperature | | -40 to +70 °C |
| Shipping and storage relative humidity | | +5% to 95%, non-condensing |
| Non-operating altitude | | Up to 50,000 feet |
| Vibration and shock | | Standard operating/non-operating random shock and vibration |
| RoHS compliance | | Yes |
| MTBF | | 500 k hours at 50 °C, 85% load, nominal input |
| Operating life | | Minimum of 5 years at 50°C, 85% load, nominal input |

1 Safety creepage/clearance rated for 5,000m altitude for CQC

CONNECTOR DEFINITION

| Connector Type | On Power Supply | Recommended Mating Connector |
|--------------------|-----------------|------------------------------------|
| AC Input Connector | IEC320-C20 | IEC320-C19 |
| Output Connector | Card-edge | FCI HPG12P14SRT153T / TE 2343428-1 |

| Output Connector Pin Configuration | | | |
|------------------------------------|-------------------|---------|--|
| A1-A9 | POWER GND | B1-B9 | POWER GND |
| A10-18 | +12V | B10-B18 | +12V |
| A19 | SDA | B19 | A0 (addressing) |
| A20 | SCL | B20 | A1 (addressing) |
| A21 | PSON# | B21 | 12VSB |
| A22 | SMBAlert# | B22 | CR_BUS |
| A23 | RETURN_SENSE | B23 | ISHARE |
| A24 | +12V_REMOTE_SENSE | B24 | GND (used by system for presence detect) |
| A25 | PWOK | B25 | VIN_GOOD |

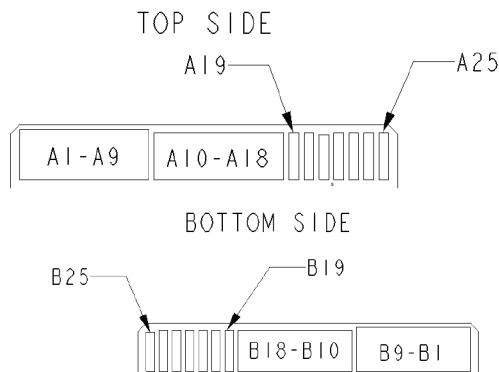

ADDRESSING

| PMBUS | | |
|-------|----|---------|
| A1 | A0 | Address |
| 0 | 0 | B0h |
| 0 | 1 | B2h |
| 1 | 0 | B4h |
| 1 | 1 | B6h |

| IPMI FRU | | |
|----------|----|---------|
| A1 | A0 | Address |
| 0 | 0 | A0h |
| 0 | 1 | A2h |
| 1 | 0 | A4h |
| 1 | 1 | A6h |



For international contact information,
visit [advancedenergy.com](https://www.advancedenergy.com).

powersales@aei.com (Sales Support)
productsupport.ep@aei.com (Technical Support)
+1 888 412 7832

ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than four decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE | TRUST

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2024 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.